


HARDWARE FITTINGS FORGED STEEL ANCHOR SHACKLE

FORGED STEEL
AS

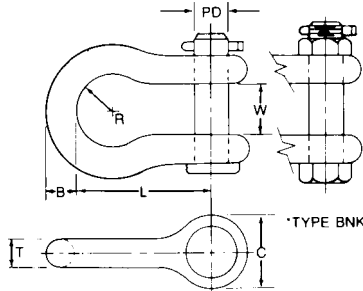

Anchor shackles are used to attach hardware to the tower pad. Back to back anchor shackles are commonly used at the tower attachment point to orient the plane of the tower plate and the balance of the insulator hardware.

Material: Body—galvanized steel
Hardware—galvanized steel
Cotter Pin—stainless steel

CATALOG NUMBER	ULTIMATE STRENGTH LBS. (KG)	DIMENSIONS INCHES (MM)							APPROX. WT. EACH LBS. (KG)
		L	B	W	C	T	R	PD	
AS25	30,000 (13,608)	2-3/8 (60.33)	5/8 (15.88)	7/8 (22.22)	1-3/8 (34.92)	1/2 (12.7)	11/16 (17.46)	5/8 (15.88)	.74 (.34)
AS25BNK	30,000 (13,608)	2-3/8 (60.33)	5/8 (15.88)	7/8 (22.22)	1-3/8 (34.92)	1/2 (12.7)	11/16 (17.46)	5/8 (15.88)	.86 (.39)
AS25L	30,000 (13,608)	2-25/32 (70.64)	5/8 (15.88)	7/8 (22.22)	1-3/8 (34.92)	1/2 (12.7)	21/32 (16.67)	5/8 (15.88)	1.00 (.45)
AS25LBNK	30,000 (13,608)	2-25/32 (70.64)	5/8 (15.88)	7/8 (22.22)	1-3/8 (34.92)	1/2 (12.7)	21/32 (16.67)	5/8 (15.88)	1.12 (.51)
AS25WBNK	30,000 (13,608)	3 (76.2)	5/8 (15.88)	1-3/4 (44.45)	1-11/16 (42.86)	5/8 (15.88)	1 (25.4)	5/8 (15.88)	1.65 (.75)
AS35	35,000 (15,876)	2-25/32 (70.64)	11/16 (17.46)	1-1/16 (26.99)	1-11/16 (42.86)	5/8 (15.88)	3/4 (19.05)	3/4 (19.05)	1.47 (.67)
AS35BNK	40,000 (18,144)	2-25/32 (70.64)	11/16 (17.46)	1-1/16 (26.99)	1-11/16 (42.86)	5/8 (15.88)	3/4 (19.05)	3/4 (19.05)	1.66 (.75)
AS50	50,000 (22,680)	3-1/2 (88.9)	7/8 (22.22)	7/8 (22.23)	1-7/8 (47.62)	3/4 (19.05)	3/4 (19.05)	3/4 (19.05)	2.25 (1.02)
AS50BNK	60,000 (27,216)	3-1/2 (88.9)	7/8 (22.22)	7/8 (22.23)	1-7/8 (47.62)	3/4 (19.05)	3/4 (19.05)	3/4 (19.05)	2.44 (1.11)
970303001	60,000 (27,216)	5 (127.0)	5/8 (15.88)	1-1/8 (28.58)	1-7/8 (47.62)	3/4 (19.05)	9/16 (14.29)	3/4 (19.05)	2.4 (1.10)
*970303002	60,000 (27,216)	5 (127.0)	5/8 (15.88)	1-1/8 (28.58)	1-7/8 (47.62)	3/4 (19.05)	9/16 (14.29)	3/4 (19.05)	2.5 (1.13)
AS50W	50,000 (22,680)	3-1/2 (88.9)	7/8 (22.22)	1-1/4 (31.75)	1-15/16 (49.21)	3/4 (19.05)	1 (25.4)	7/8 (22.22)	2.25 (1.02)
AS50WBNK	60,000 (27,216)	3-1/2 (88.9)	7/8 (22.22)	1-1/4 (31.75)	1-15/16 (49.21)	3/4 (19.05)	1 (25.4)	7/8 (22.22)	2.75 (1.25)
AS60BNK	80,000 (36,288)	3-3/4 (95.25)	7/8 (22.22)	1-7/16 (36.51)	2-1/8 (53.98)	7/8 (22.23)	1-1/8 (28.58)	1 (25.4)	4.31 (1.96)
AS60875BNK	72,000 (32,688)	3-3/4 (95.25)	7/8 (22.22)	1-7/16 (36.51)	2-1/8 (53.98)	7/8 (22.23)	1-1/8 (28.58)	7/8 (22.22)	4.10 (1.86)
*974153001	120,000 (54,432)	6 (152.4)	1 (25.4)	1-1/2 (38.1)	2-3/8 (60.33)	1 (25.4)	1-1/16 (26.99)	1-1/8 (28.58)	6.20 (2.81)
974153002	100,000 (45,360)	6 (152.4)	1 (25.4)	1-1/2 (38.1)	2-3/8 (60.33)	1 (25.4)	1-1/16 (26.99)	1-1/8 (28.58)	6.00 (2.72)
*976743001	100,000 (45,360)	4-5/16 (109.54)	1 (25.4)	1-11/16 (42.86)	2-3/8 (60.33)	1 (25.4)	1-11/32 (34.13)	1-1/8 (28.58)	5.90 (2.69)
*946693001	100,000 (45,360)	4-5/16 (109.54)	1 (25.4)	1-3/16 (46.04)	2-3/8 (60.33)	1 (25.4)	1-11/32 (34.13)	1-1/8 (28.58)	5.70 (2.59)
AS135	135,000 (61,236)	6 (152.4)	1-1/2 (38.1)	2-1/4 (57.15)	3-3/8 (85.72)	1-3/8 (34.92)	1-13/16 (46.04)	1-1/2 (38.1)	15.75 (7.14)
AS135BNK	150,000 (68,040)	6 (152.4)	1-1/2 (38.1)	2-1/4 (57.15)	3-3/8 (85.72)	1-3/8 (34.92)	1-13/16 (46.04)	1-1/2 (38.1)	15.75 (7.14)

*These shackles are type BNK.