



DUCTILE DEADEND THIMBLE TYPE DDT


DUCTILE IRON

DDT

DA
23

Provides a convenient and efficient means for loop deadending of steel static wire and bare or insulated aluminum or copper phase wires. Magnetic induction heating will occur.

Material: Body - Ductile Iron, Galvanized
Clevis Pin - Galvanized Steel
Cotter Pin - #302 Stainless Steel



Product Data & Conductor Size

CATALOG NUMBER	CONDUCTOR RANGE INCHES (MM)	ULTIMATE BODY STRENGTH LBS. (kN)	DIMENSIONS INCHES (MM)					APPROX. WT. EACH LBS. (KG)
			L	B	W	H	PD	
DDT07	0-.875 (0-22.23)	40,000 (178)	5-3/8 (136.53)	2-5/16 (58.74)	7/8 (22.23)	3-1/4 (82.55)	3/4 (19)	2.5 (1.13)
DDT12*	0-1.0 (0-25.40)	60,000 (267)	7-13/16 (45.97)	3-3/4 (95.25)	1-5/16 (33.27)	3-3/4 (95.25)	1 (25)*	5.7 (2.5)

*Bolt, Nut & Cotter Pin are standard.


DEADENDS ALUMINUM DEADEND THIMBLE TYPE ADET

ALUMINUM

ADET

Provides a convenient and efficient means for loop deadending of steel static wire and bare or insulated aluminum or copper phase wires. Magnetic induction heating will occur.

Material: Body - Ductile Iron, Galvanized
Clevis Pin - Galvanized Steel
Cotter Pin - #302 Stainless Steel

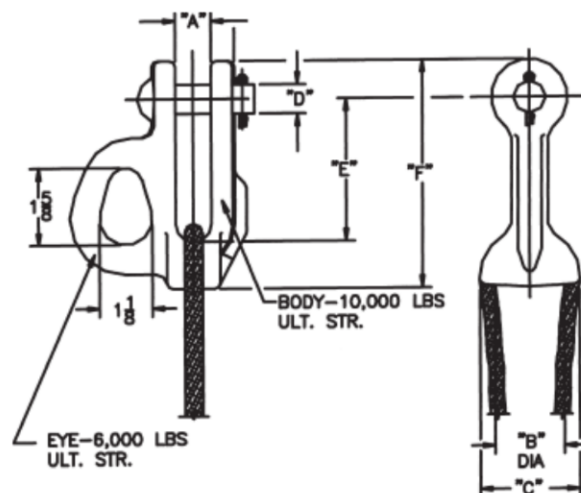

Product Data & Conductor Size

CATALOG NUMBER	CONDUCTOR RANGE INCHES (MM)		RATED STRENGTH LBS. (kN)		DIMENSIONS INCHES (MM)					
	ACSR	GUY WIRE	THIMBLE	EYE	A	B	C	D	E	F
ADET75	#6 - 336.4	3/16 - 5/16	10,000 (44.48)	6,000 (26.69)	0.75 (19)	1.5 (38.1)	2.12 (53.8)	0.63 (16)	3 (76.2)	4.81 (122.2)
ADET88	#6 - 477	3/16 - 3/8	12,000 (53.38)	7,000 (31.14)	0.88 (22.4)	1.5 (38.1)	2.12 (53.8)	0.63 (16)	3 (76.2)	4.81 (122.2)