



Series 2, 3, 4, & 5 Aluminum Cable Ladder

B305 Thru B308 & B321 Series Beam Clamps


- Finishes available: ZN or HDG
- Setscrew included.
- Safety Load Factor 5.0



Cat. No.	Rod Size A	B	C	D	E	F	T	Design Load	
								lbs	kN
B305	3/8"-16	3/8"-16	2 5/16	7/8	1 1/8	2 1/2	11 Ga.	600	2.67
B306	3/8"-16	1/2"-13	2 7/16	7/8	1 1/8	2 1/2	7 Ga.	1100	4.90
B307	1/2"-13	1/2"-13	2 7/16	7/8	1 1/8	2 1/2	7 Ga.	1100	4.90
B308	1/2"-13	1/2"-13	2 9/16	7/8	1 1/8	2 1/2	1/4	1500	6.68
B321-1	3/8"-16	1/2"-13	3 9/16	1 1/16	1 5/8	3 1/4	1/4	1300	5.79
B321-2	1/2"-13	1/2"-13	3 9/16	1 1/16	1 5/8	3 1/4	1/4	1400	6.23

B312 Anchor Strap

- Finish available: ZN
- For a maximum beam thickness of 3/4".
- For thicker beams, step up one flange width size.




Cat. No.	Flange Width
B312-6	Up to 6"
B312-9	6" - 9"
B312-12	9" - 12"

Beam Clamp

- Finishes available: ZN, GRN or HDG
- Sold in pieces.


* Design load when used in pairs.
Safety Load Factor 5.0



Catalog No.	Design Load*		Max. Flange Thickness		Material Thickness	
	lbs	kN	in.	mm	in.	mm
B212-1/4	600	2.67	3/4	28.6	1/4	6.3
B212-3/8	1000	4.45	1 1/8	6.3	3/8	9.5


Beam Clamp

- Finish available: ZN
- Design Load 500 lbs. (2.22 kN)
- Safety Load Factor 5.0
- Recommended torque: 'J'-Hook Nut 125 In.-Lbs. (14.1 kN/m)
- Maximum flange thickness of 3/4"



Catalog No.	For Flange Width		Wt./C	
	in.	mm	lbs	kg
B750-J4	3 - 6	76.2 - 152.4	109	49.4
B750-J6	5 - 9	127.0 - 228.6	124	56.2
B750-J9	8 - 12	203.2 - 304.8	135	61.2
B750-J12	11 - 15	279.4 - 381.0	147	66.7

Beam Clamp

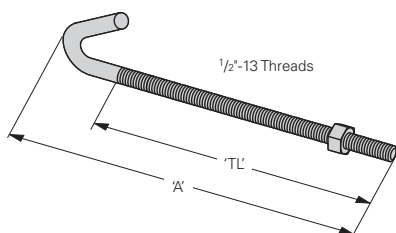

Catalog No.	'A'		Thread Length 'TL'		Wt./C	
	in.	mm	in.	mm	lbs	kg
B700-J4	8 1/2	215.9	5	127.0	44	19.9
B700-J6	11 1/2	292.1	6	152.4	53	24.0
B700-J9	12 1/4	368.3	6	152.4	63	28.6
B700-J12	17 1/2	444.5	6	152.4	78	35.4

- Finish available: ZN
- Hex Nut included.

Aluminum