
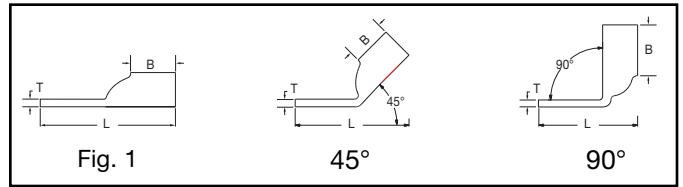


ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

45° and 90° angles are available.

Please contact Customer Service to order:
1-800-346-4175



C-15



Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling					Wire Strip Length
		AWG	MM²			(B)	(T)	(L)		Mechanical MD6, OUR840, MD7-34R	Hydraulic BCT500HS, Y500CTHS		Y35, Y39, Y750, Y46*, PAT750	Color Code	Die Index
YA4CL-BOX	1	#4 AWG		1/4"	.50"	.81"	.09"	1.74"	Y1MRTC (2) MY29-3 (1) MY29-11 (1) MRC840 (1) Y644HS (1) Y81KFT (1) Y81KFTMBH (1) PAT81KFT-18V (1)	W4CVT (1) W4CRT (1) X4CRT (1)	W4CVT (1) W4CRT (1) X4CRT (1)	U4CRT (1) U6CABT (1)	Gray	8	7/8"
YA4CL1-BOX	1			8-10	.50"	.81"	.09"	1.58"							
YA4CL3-BOX	1			5/16"	.58"	.81"	.08"	1.92"							
YA4CL4-BOX	1			3/8"	.58"	.81"	.08"	1.92"							
YA4CL6-BOX	1			1/2"	.71"	.81"	.06"	2.20"							
YA3CL	1	# 3 Str # 2 Sol	25	5/16"	.55"	.88"	.09"	1.88"		W3CRT (1)	W3CRT (1)	U3CRT (1)	White	9	15/16"
YA2CL2-BOX	1	#2 AWG	35	1/4"	.61"	.88"	.11"	1.88"		W2CVT (1)	W2CVT (1)	U2CRT (1)	Brown	10	15/16"
YA2CL-BOX	1			5/16"	.61"	.88"	.11"	1.93"		W2CRT (1)	W2CRT (1)				
YA2CL4-BOX	1			3/8"	.61"	.88"	.11"	2.06"		X2CRT (1)	X2CRT (1)				
YA2CL6-BOX	1			1/2"	.73"	.88"	.09"	2.32"							
YA1CL2	1	#1 AWG	50	1/4"	.68"	.88"	.10"	1.81"		W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	U1CRT-1 (1) U4CABT (1)	Green	11	15/16"
YA1CL-BOX	1			5/16"	.68"	.88"	.01"	1.94"							
YA1CL4-BOX	1			3/8"	.68"	.88"	.10"	2.06"							
YA1CL6-BOX	1			1/2"	.73"	.88"	.09"	2.37"							
YA25L2-BOX	1	1/0 AWG		1/4"	.75"	.88"	.12"	1.84"	MY29-3 (1) MY29-11 (1) MRC840 (2) Y644HS (1) Y81KFT (1) Y81KFTMBH (1) PAT81KFT-18V (1)	W25VT (2) W25RT (2) X25RT (2)	W25VT (2) W25RT (2) X25RT (2)	U25RT (1) U2CABT (1)	Pink	12	15/16"
YA25L4-BOX	1			3/8"	.75"	.88"	.12"	2.09"							
YA25L6-BOX	1			1/2"	.75"	.88"	.12"	2.34"							
YA25L-BOX	1			5/16"	.75"	.88"	.12"	1.96"							
YA26L2-BOX	1	2/0 AWG	70	1/4"	.83"	.94"	.12"	1.94"		W26VT (2) W26RT (2) X26RT (2)	W26VT (2) W26RT (2) X26RT (2)	U26RT (1)	Black	13	1"
YA26L-BOX	1			3/8"	.83"	.94"	.12"	2.19"							
YA26L60	1			3/4"	.96"	.94"	.12"	2.96"							
YA26L6-BOX	1			1/2"	.83"	.94"	.12"	2.44"							
YA26LNT516	1			5/16"	.62"	.94"	.13"	2.62"							
YA27L3	1	3/0 AWG		5/16"	.91"	1.00"	.13"	2.16"		W27VT (2) W27RT (2) X27RT (3)	W27VT (2) W27RT (2) X27RT (3)	U27RT (1)	Orange	14	1-1/16"
YA27L4-BOX	1			3/8"	.91"	1.00"	.13"	2.29"							
YA27L-BOX	1			1/2"	.91"	1.00"	.13"	2.54"							
YA27LNT38	1			3/8"	.76"	1.00"	.12"								
YA28L2-BOX	1	4/0 AWG		1/4"	1.02"	.88"	.14"	1.96"		W28VT (2) W28RT (2) X28RT (3)	W28VT (2) W28RT (2) X28RT (3)	U28RT (1)	Purple	15	1-1/8"
YA28L3	1	4/0 AWG		5/16"	1.02"	.88"	.14"	2.08"	MY29-3 (1) MY29-11 (1) MRC840 (2) Y644HS (1) Y81KFT (2) Y81KFTMBH (2) PAT81KFT-18V (2)	W28VT (2) W28RT (2) X28RT (2)	W28VT (2) W28RT (2) X28RT (3)	U28RT (1)	Purple	15	1-1/8"
YA28L4-BOX	1			3/8"	1.02"	.88"	.14"	2.21"							
YA28L56	1			3/4"	1.05"	.88"	.13"	1.97"							
YA28L-BOX	1			1/2"	1.02"	.88"	.14"	2.46"							
YA28LNT38	1			3/8"	.76"	.88"	.16"	2.79"							

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.
** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
▲ See tooling section of this catalog for complete tool and die listings.

Note: All dimensions shown are for reference only.

Throughout the catalog you will notice blue highlighted items. These are the most frequently ordered BURNDY® Products.