


UL LISTED TO U.S. AND
CANADIAN SAFETY STANDARDS
DAMP LOCATION
MAX AMBIENT: 55°C

LARGE PRISMPACK®V

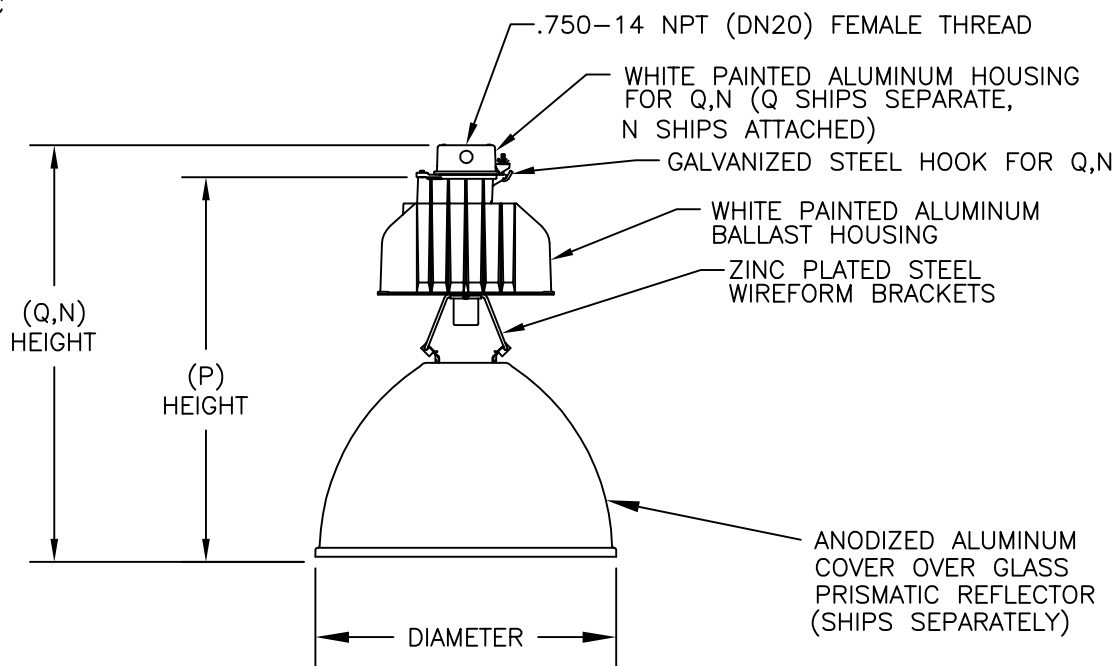

PRISMPACK V

CATALOG NUMBER

PV

SOURCE & WATTAGE

- ☐ 750HP=750W HPS
- ☐ CP1HP=1000W HPS
COMPACT LAMP, NO THRU
WIRING W/N MOUNTING
- ☐ C10MP=1000W MH
- ☐ C10HP=1000W HPS

VOLTAGE

- ☐ 12=120V
- ☐ 20=208V
- ☐ 24=240V
- ☐ 27=277V
- ☐ 34=347V
- ☐ 48=480V
- ☐ MT=MULTIVOLT
120,208,240,277V
- ☐ MA=MULTIVOLT PREWIRED (120V)
- ☐ MB=MULTIVOLT PREWIRED (208V)
- ☐ MC=MULTIVOLT PREWIRED (240V)
- ☐ MD=MULTIVOLT PREWIRED (277V)

MOUNTING

- ☐ P=PENDANT
- ☐ Q=QUICK DISCONNECT
- ☐ N=NON-DISCONNECT/
THRU WIRING

SPACER

- ☐ F
- ☐ H
- ☐ W
- ☐ Y

OPTICS REFLECTORS

- ☐ 11=6611-AL
- ☐ 12=6612-AL
- ☐ 13=6613-AL

OPTICS	DIAMETER	(P) HEIGHT	(Q,N) HEIGHT
6631-A-AL	393mm(15.50)	701mm(27.60)	760mm(29.95)
6611-AL	457mm(18.00)	686mm(27.00)	750mm(29.55)
6612-AL	565mm(22.25)	838mm(33.00)	900mm(35.45)

LARGE PRISMPACK® V

OPTIONS (SOME RESTRICTIONS APPLY)(ADD TO CATALOG NUMBER):

- ☐ EM=STANDBY LIGHTING FIXTURE (LAMP SUPPLIED)(NOT AVAIL. W/750HP27, 750HP48)
(AND 40°C AMBIENT ONLY)
- ☐ ER=EMERGENCY LIGHTING LESS RELAY (LAMP SUPPLIED)(NOT AVAIL. W/Q, CDP, PHCB)
- ☐ PS=PROTECTED STARTER (HPS UNITS ONLY)(NOT AVAILABLE WITH 750HP)
- ☐ F1=SINGLE FUSING FOR 120, 240, 277 AND 347V UNITS (FACTORY INSTALLED)
- ☐ F2=DOUBLE FUSING FOR 208, 240 AND 480V UNITS (FACTORY INSTALLED)
- ☐ H=HALT AUTOMATIC LAMP TIMEOUT (MP OR PM/PP UNITS ONLY)
- ☐ 65=65° AMBIENT (C10MP & C10HP ONLY)(NOT AVAILABLE WITH H)
- ☐ PHCB=POWERHOOK CORD FOR 120, 208, 240, 277V (INCLUDES PF-105-B)
- ☐ PHCB-L8-480=POWERHOOK CORD FOR 480V (INCLUDES PF-105-B)
- ☐ CDP-L5-15-X=120V CORD & PLUG (ORDER PF ALSO)
- ☐ CDP-L6-15-X=208/240V CORD & PLUG (ORDER PF ALSO)
- ☐ CDP-L7-15-X=277V CORD & PLUG (ORDER PF ALSO)
- ☐ CDP-L8-15-X=480V CORD & PLUG (ORDER PF ALSO)
- ☐ CDP-L24-20-X=347V CORD & PLUG (ORDER PF ALSO)
- ☐ PF-104=HOOK, 3/4" MALE
- ☐ LP=LOOP, 3/4" MALE
- ☐ HK=SAFETY HOOK, 3/4" MALE
- ☐ PF-129=ANTI-ROTATIONAL HOOK, 3/4" MALE
- ☐ PF-105=LOOP, 3/4" MALE
- ☐ PF-121=SAFETY HOOK, 3/4" MALE
- ☐ 08214-*=SAFETY CHAIN (*=LENGTH OF CHAIN IN FEET, 3 FT IS STANDARD)
- ☐ ELB=EXTRA LOW BRIGHTNESS
- ☐ CD-3=3 FT CORD ONLY
- ☐ CD-4=4 FT CORD ONLY
- ☐ CD-5=5 FT CORD ONLY
- ☐ CD-6=6FT CORD ONLY

ACCESSORIES (SHIPS SEPARATELY)(ADD TO CATALOG NUMBER):

- ☐ LAMP=SHIP APPROPRIATE HID LAMP
- ☐ 0277=WIREGUARD ACCESS DOOR FOR 09269 & 09270 WIREGUARDS
- ☐ 09269=WIREGUARD FOR 11 & 13 OPTIC
- ☐ 09270=WIREGUARD FOR 12 OPTIC
- ☐ UPH-35-***-WH=THRU-WAY POWERHOOK 120, 208, 240, 277V
- ☐ UPH-35-L8-480-WH=THRU-WAY POWERHOOK CORD 480V
- ☐ UPH-36-***-WH=PENDANT POWERHOOK 120, 208, 240, 277V
- ☐ UPH-36-L8-480-WH=THRU-WAY POWERHOOK CORD 480V
- ☐ PF-116-A=LOOP, 3/4" FEMALE
- ☐ PF-122-A=SAFETY HOOK, 3/4" FEMALE
- ☐ PF-104-B=HOOK, 3/4" MALE
- ☐ LOOP456=LOOP, 3/4" MALE
- ☐ HOOK455=SAFETY HOOK, 3/4" MALE
- ☐ PF-129-A=ANTI-ROTATIONAL HOOK, 3/4" MALE
- ☐ PF-291=UNIVERSAL GASKETED HOOK ASSEMBLY, 3/4" MALE
- ☐ PF-105-B=LOOP, 3/4" MALE
- ☐ PF-121-A=SAFETY HOOK, 3/4" MALE
- ☐ PS-1000=REPLACEMENT PROTECTED STARTER FOR C10HP



ORDER NO: _____
TYPE: _____

DRAWING NO. MA-4803
CAD MODEL: PV.DWG
DATE: 2/24/10
Sheet 2 of 2