



KILLARK®

NVL Series

Corrosion Resistant Fixtures

for Harsh and Hazardous Environments





NVL SERIES

KILLARK

NON-METALLIC CORROSION RESISTANT HAZARDOUS FIXTURES



Class I, Div. 2, Groups A,B,C,D
Class I, Zone 2, Groups IIC,IIB,IIA
Class II, Div. 2, Groups F,G
Class III
UL Marine Rated (US only)
Type 3, 4, 4X, IP66

Certified - File LR11713

ABS Type Approval

to the following standards:

- UL 1598 Standard for luminaires
- UL 1598A Marine type luminaires
- UL 844 Standard for lighting fixtures for hazardous locations
- CSA C22.2 no. 137-M1981 electric luminaires for use in hazardous locations
- Enclosed and gasketed


FEATURES - SPECIFICATIONS

ENVIRO^{RITE}® II

Features

- Corrosive resistant body molded from 30% glass-filled thermoset polyester
- Energy and labor-saving LED
- High Efficacy (lumens per watt)
- Compact Size
- Diffuse polycarbonate globe that softens the light while providing impact protection
- Accessories include polycarbonate dome reflectors and wall extension
- Type 3, 4, & 4X Rated
- IP66
- Marine Rated
- ABS Approved

Catalog Number Logic

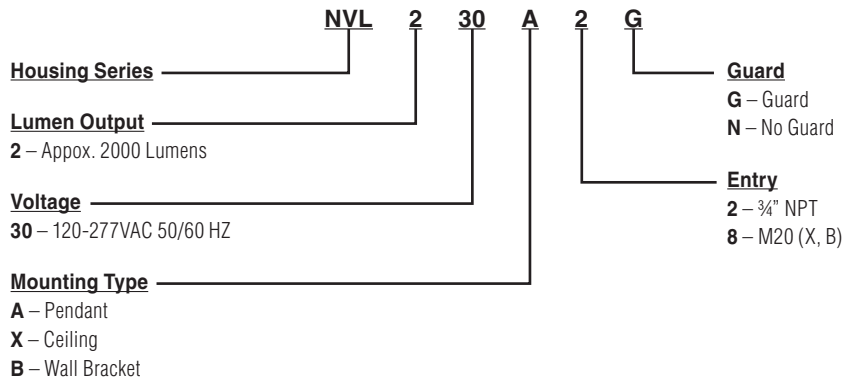


NVL COMPONENTS AND ACCESSORIES


CATALOG NUMBER	DESCRIPTION		
NV2AG	Pendant	3/4" NPT	Pendant splice box with 316 stainless steel set screw at the conduit connection
NV2XG	Ceiling Box	3/4" NPT	Ceiling box vol. 24 cu. inches
NV2MG		M20	
NV2BG	Wall Bracket		Use with NV2XG or NV2MG for wall mount
NVPSD12	Reflector		White Polycarbonate Reflector (secured by guard)
NVEXTG	Extension		Extension for wall mount fixture with reflector
NV2CG	Gray Cover		Blank covers for NV2XG & NV2MG Ceiling Boxes
NV2CC	Clear Cover		
NV2GG-S	Compact Guard		Low Profile Non-Metallic Guard that is also used to secure reflector

NON-METALLIC CORROSION RESISTANT HAZARDOUS FIXTURES


COMPONENT PARTS

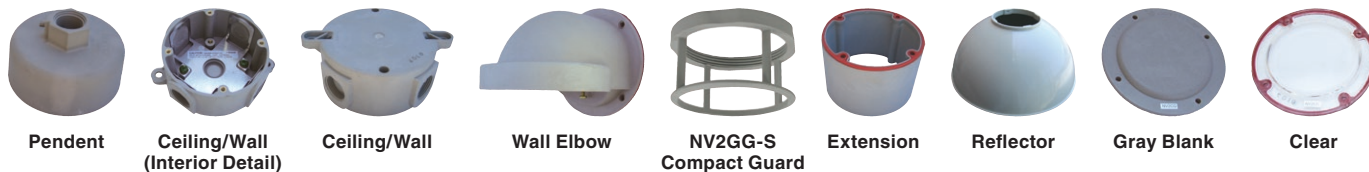

Ceiling Mount

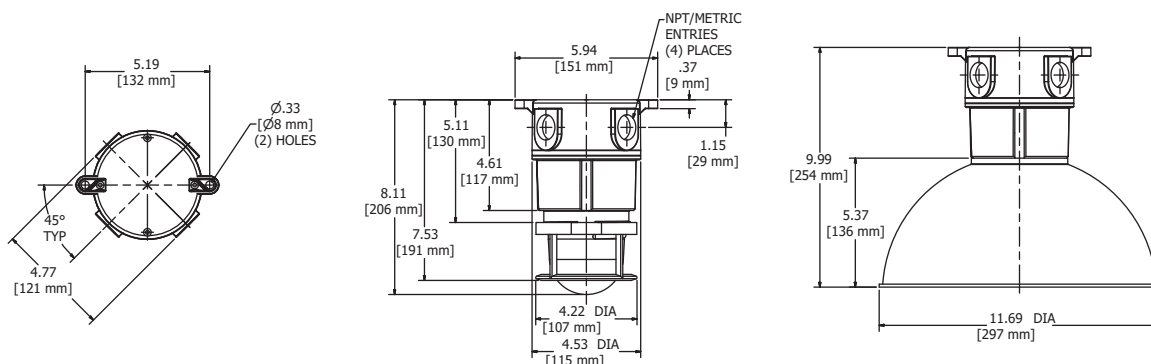

Pendant Mount

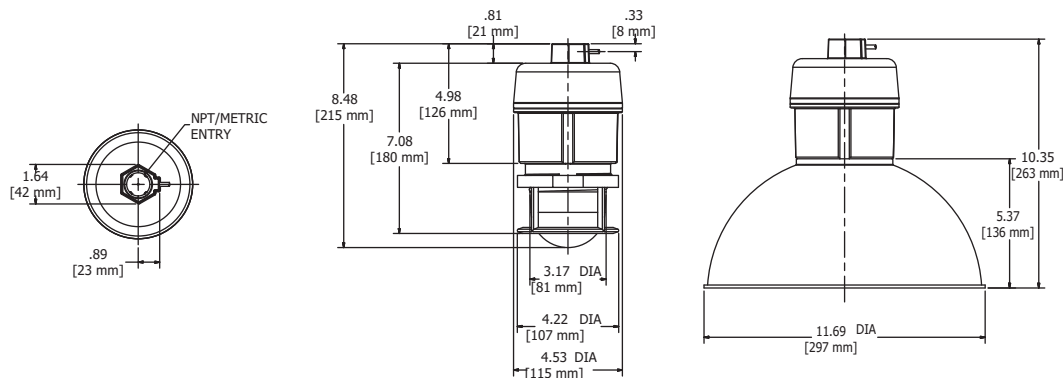

Wall Mount

