

TC GLOBALLY APPROVED, HAZARDOUS (CLASSIFIED) LOCATION CABLE GLAND

FOR ALL TYPES OF UNARMORED TRAY CABLES, FLEXIBLE CABLES & CORD

- Aluminum, nickel plated brass or stainless steel design
- Increased cable range with removable insert
- Optional thread sizes
- 76°F to 230°F
- Globally marked, cCSAus, IECEx & ATEX
- Heavy duty design
- Entry thread seal as standard



IP66

DELUGE PROTECTED

IP67

+230°F
↑
-76°F

IP68

NEMA 4X

AEx e
Ex e

AEx d
Ex d


AEx t
Ex t

AEx nR
Ex nR

TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
INGRESS PROTECTION RATING**	IP66, IP67 & IP68***
NEMA RATING**	NEMA 4X

CABLE GLAND MATERIAL	Copper Free (<0.4%) Aluminum, Nickel Plated Brass, Stainless Steel
CABLE TYPE	Tray Cable & Cords, Unarmored / Braid (IEC)
SEALING TECHNIQUE	CMP Displacement Seal with Removable Insert
SEALING AREA(S)	Cable Outer Jacket

* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444 ** When CMP installation accessories are used. Refer to www.cmp-products.com for further information. *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternate depths / durations can be provided upon request

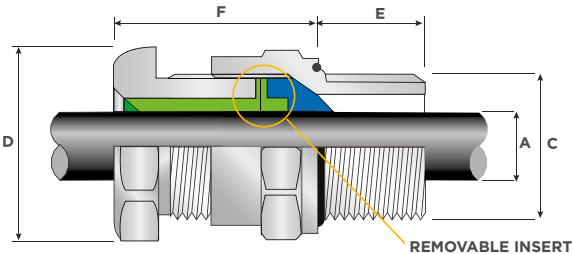

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML 18ATEX1334X	IECEx CERTIFICATE	IECEx CML 18.0191X
CODE OF PROTECTION	Ex II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
COMPLIANCE STANDARDS	EN 60079-0,1,7,31	COMPLIANCE STANDARDS	IEC 60079-0,1,7,31
cCSAus CERTIFICATE	2220601		
CSAus CODE OF PROTECTION	Class II, Division 2, Groups E, F, and G; Class III, Division 2; Enclosure, Type 4X. Ex e; Class I, Zone 1, AEx e;		
cCSA CODE OF PROTECTION	Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups E, F, and G; Class III, Division 2; Enclosure, Type 4X. Ex e; Class I, Zone 1, AEx e;		
COMPLIANCE STANDARDS	CAN/CSA-C22.2 Various Sections (See Certificate) CAN/CSA-E60079-0,7, CAN/CSA-E6124111, ANSI/UL 514B Ed 5, ANSI/UL 50Ed 11, ANSI/UL 60079-0,7		
EAC CERTIFICATE	TC RU C-GB.AA87.B.00487	UkrSEPRO	UA.TR.047.C.0644-15
CODE OF PROTECTION	TExd IIC Gb X, TExe IIC Gb X, Exta IIC Da X IP66		
RETIE APPROVAL NUMBER	03866		
MARINE APPROVALS	LRS: 01/00172 DNV: TAE00000Y ABS: 15-LD1410479-PDA BV: 43180 A1 BV		



ORDER REFERENCE (NPT)			ENTRY THREAD 'C'		MINIMUM THREAD LENGTH 'E'	CABLE RANGE 'A'				ACROSS FLATS 'D'	ACROSS CORNERS 'D'	NOMINAL ASSEMBLY LENGTH 'F'	SHROUD	APPROX WEIGHT ALUMINUM (OZS)
ALUMINUM	NICKEL PLATED BRASS	STAINLESS STEEL	NPT	NPT OPTION		INSERT		NO INSERT		MAX	MAX			
						MIN	MAX	MIN	MAX					
TC-050A028	TC-050NB028	TC-050SS028	1/2"	-	0.78	0.13	0.28	-	-	1.20	1.32	1.20	PVC05	1.94
TC-075A028	TC-075NB028	TC-075SS028	-	3/4"	0.80					1.48	1.59			1.24
TC-050A055	TC-050NB055	TC-050SS055	1/2"	-	0.78	0.26	0.41	0.41	0.55	1.20	1.32	1.20	PVC06	1.94
TC-075A055	TC-075NB055	TC-075SS055	-	3/4"	0.80					1.48	1.63			1.24
TC-075A079	TC-075NB079	TC-075SS079	3/4"	-	0.80	0.44	0.61	0.61	0.79	1.48	1.63	1.24	PVC09	1.69
TC-100A079	TC-100NB079	TC-100SS079	-	1"	0.98					1.81	1.96			1.65
TC-100A104	TC-100NB104	TC-100SS104	1"	-	0.98	0.67	0.85	0.85	1.04	1.81	1.99	1.65	PVC11	3.88
TC-125A104	TC-125NB104	TC-125SS104	-	1 1/4"	1.01					2.05	2.21			
TC-125A127	TC-125NB127	TC-125SS127	1 1/4"	-	1.01	0.93	1.10	1.10	1.27	2.05	2.25	1.65	PVC13	4.94
TC-150A127	TC-150NB127	TC-150SS127	-	1 1/2"	1.03					2.36	2.55			
TC-150A150	TC-150NB150	TC-150SS150	1 1/2"	-	1.03	1.22	1.37	1.37	1.50	2.36	2.60	1.65	PVC21	6.00
TC-200A150	TC-200NB150	TC-200SS150	-	2"	1.06					2.95	3.19			
TC-200A174	TC-200NB174	TC-200SS174	2"	-	1.06	-	-	1.40	1.74	2.76	2.98	1.63	PVC21	8.64
TC-250A174	TC-250NB174	TC-250SS174	-	2 1/2"	1.57					3.54	3.83			
TC-200A197	TC-200NB197	TC-200SS197	2"	-	1.06	-	-	1.63	1.97	2.76	3.03	1.74	PVC28	8.29
TC-250A197	TC-250NB197	TC-250SS197	-	2 1/2"	1.57					3.54	3.83			
TC-250A220	TC-250NB220	TC-250SS220	2 1/2"	-	1.57	-	-	1.86	2.20	3.54	3.83	1.74	PVC28	13.58
TC-300A220	TC-300NB220	TC-300SS220	-	3"	1.63					4.33	4.68			
TC-250A244	TC-250NB244	TC-250SS244	2 1/2"	-	1.57	-	-	2.13	2.44	3.54	3.90	1.79	PVC31	13.58
TC-300A244	TC-300NB244	TC-300SS244	-	3"	1.63					4.33	4.68			
TC-300A268	TC-300NB268	TC-300SS268	3"	-	1.63	-	-	2.41	2.68	4.33	4.68	1.79	PVC31	23.63
TC-350A268	TC-350NB268	TC-350SS268	-	3 1/2"	1.69					4.84	5.23			
TC-350A315	TC-350NB315	TC-350SS315	3 1/2"	-	1.69	-	-	2.62	3.15	4.84	5.23	2.50	LSF33	34.22
TC-400A315	TC-400NB315	TC-400SS315	-	4"	1.73					5.25	5.67			
TC-400A354	TC-400NB354	TC-400SS354	4"	-	1.73	-	-	2.99	3.54	5.25	5.67	2.36	LSF34	38.80

Order Code Example: TC-050A028 - "TC" (Type Gland) - "050" (1/2" NPT Thread) - 'A' (Material Aluminum) - "028"(Max Cable Diameter 0.28")

Dimensions are displayed in inches unless otherwise stated