

RIGID - IMC

FS & FD Cast Device Boxes

Features:

- Tapered threads (NPT with integral bushings)
- Internal grounding screw
- Suitable for use in wet locations when used with FSFDCMI cover and FSFDCG gasket
- Malleable iron is suitable for concrete use

Standard Materials:
Malleable iron

Standard Finish:
Zinc plated


Applicable Third Party Standards:
UL Standard: 514A
NEMA: FB-1



FS Type




FD Type

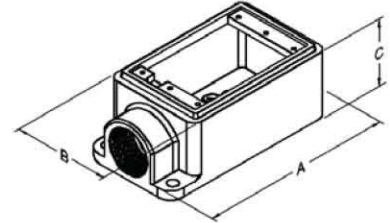

FSC Type



FDC Type

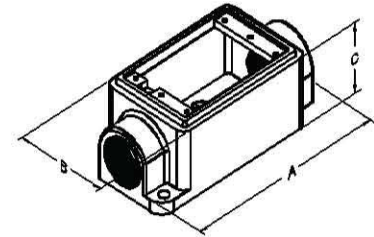

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
FS50	1/2"	5-1/4"	2-15/16"	2-1/8"	24	221.9
FS75	3/4"	5-1/4"	2-15/16"	2-1/8"	24	233.5
FS100	1"	5-1/4"	2-15/16"	2-1/8"	24	242.8
FD50	1/2"	5-1/4"	3"	2-7/8"	16	278.1
FD75	3/4"	5-1/4"	3"	2-7/8"	16	272.8
FD100	1"	5-1/4"	3"	2-7/8"	16	283.7
FSC50	1/2"	6-1/16"	2-15/16"	2-1/8"	24	234.4
FSC75	3/4"	6-1/16"	2-15/16"	2-1/8"	24	240.6
FSC100	1"	6-1/16"	2-15/16"	2-1/8"	24	250.2
FDC50	1/2"	6-1/16"	3"	2-7/8"	16	313.1
FDC75	3/4"	6-1/16"	3"	2-7/8"	16	93.8
FDC100	1"	6-1/16"	3"	2-7/8"	16	305.6

