
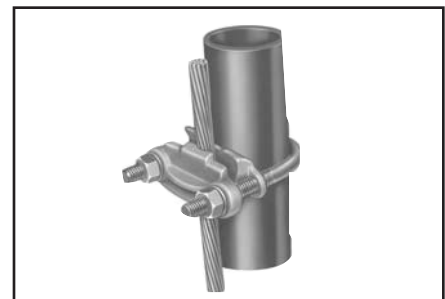
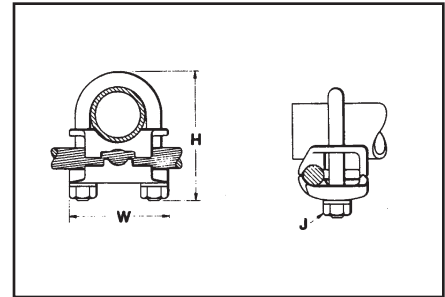


TYPE GAR

FENCE POST GROUNDING CONNECTOR

For Parallel or 90°
Copper Cable
Connection

To Rod or Pipe with
the Same Connector

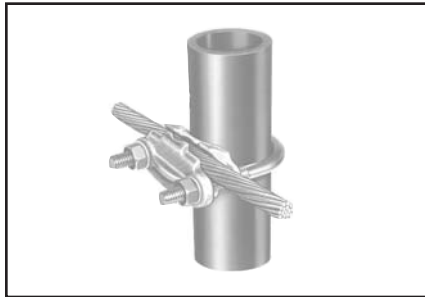

D-28

High copper alloy ground connector for joining a range of cable, parallel or at right angles to rod or tube. Especially good for fence posts. High copper alloy cast body with DURILIUM™ U-bolts, nuts and lockwashers, permit entire connection to be buried in ground or concrete without danger of corrosion.

- One-wrench installation.
- UL467 Listed.
- Acceptable for direct burial.

Catalog Number	Conductor			H	J	W
	Tube I.P.S.	Rod Size or O.D. Range	Cable			
GAR114C	1/4	1/2	8 Sol. - 4 Str.	2-1/2	3/8	1-7/8
GAR1126			4 Sol. - 2/0 Str.			
GAR1129			2/0 Sol. - 250			
GAR644C	3/8	5/8 - 3/4	8 Sol. - 4 Str.	2-7/8		2-1/8
GAR6426			4 Sol. - 2/0 Str.			
GAR6429			2/0 Sol. - 250			
GAR6434	1/2 - 3/4	7/8 - 1	300 - 500	3-1/2	1/2	2-1/2
GAR144C			8 Sol. - 4 Str.	2-3/4	3/8	2-3/8
GAR1426			4 Sol. - 2/0 Str.	3		
GAR1429			2/0 Sol. - 250	3-3/4		2-3/4
GAR1434			300 - 500	1/2		
GAR154C			1	1-1/8 - 1-1/4	8 Sol. - 4 Str.	2-7/8
GAR1526	4 Sol. - 2/0 Str.					
GAR1529	2/0 Sol. - 250	3-3/8				
GAR1534	300 - 500	4-1/2			1/2	
GAR164C	1-1/4	1-3/8 - 1-1/2	8 Sol. - 4 Str.	3-1/2	3/8	3
GAR1626			4 Sol. - 2/0 Str.			
GAR1629			2/0 Sol. - 250			
GAR1634			300 - 500	4-1/4	1/2	3-3/8
GAR174C	1-1/2	1-5/8 - 1-7/8	8 Sol. - 4 Str.	4	3/8	3-1/4
GAR1726			4 Sol. - 2/0 Str.			
GAR1729			2/0 Sol. - 250			
GAR1734			300 - 500	4-5/8	1/2	2-5/8
GAR184C	2	2 - 2-3/8	8 Sol. - 4 Str.	4-1/4	3/8	3-3/4
GAR1826			4 Sol. - 2/0 Str.			
GAR1829			2/0 Sol. - 250			
GAR1834			300 - 500	5-1/4	1/2	4-1/8
GAR194C	2-1/2	2-1/2 - 7/8	8 Sol. - 4 Str.	5	3/8	4-1/4
GAR1926			4 Sol. - 2/0 Str.			
GAR1929			2/0 Sol. - 250			
GAR1934			300 - 500	5-5/8	1/2	4-5/8